

Material/Finish




	CUSB
Bracket Body	Zinc Die Cast Chrome Plating (Matte)
Push Button	Polyacetal (Orange)

Part Number	W	L1	L	H	Applicable Square Shaft	Max. Retention Force*1 (N)	Mass (g)
CUSB-2B-1212	12	12	25.5	4	□12 _{-0.43}	100	149
CUSB-2B-1616	16	16	29.5	8	□16 _{-0.43}	100	160

*1: Static load retaining CUSB and the square shaft.

CUSB-BC Bottom Cover

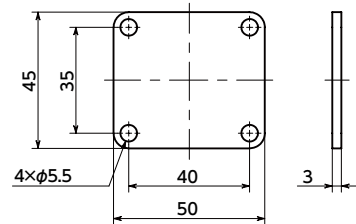

Material/Finish




	CUSB-BC
Main Body	SUS304
Special Low Profile Cap Screws	SCM435
SSH-M5-10-EL	Electroless Nickel Plating

Part Number	Mass (g)
CUSB-BC	57

4 special low profile cap screws SSH-M5-10-EL for installing to CUSB are included.

- Brackets for convenient positioning on square shafts.
- Push the push button to unlock the lock and release the push button to fix it in position.
- Operating principle
CUSB internal rollers push on and secure the square shaft to the attachment surface.
If using CUSB without fixing to a device/machine, use the bottom cover CUSB-BC (sold separately).


➔ P.xxxx

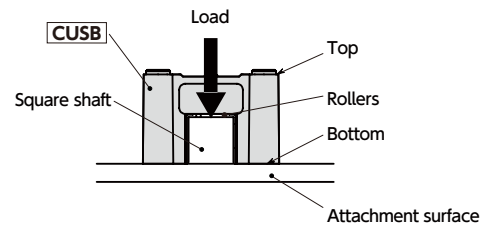


- Can retain up to 100 N.
- Push button press count resistance is 10,000 times (reference value).

Usage example

Limit switches attached to CUSB can be fixed at any desired location parallel to the secured square shaft.

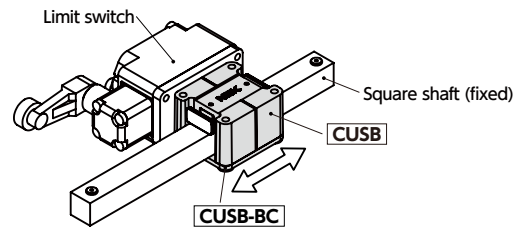


Proximity sensors attached to the square shaft can be fixed at any desired location.

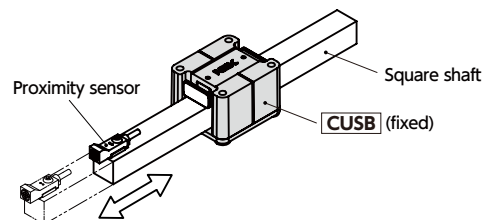


Usage


- Mount CUSB to the device/machine attachment surface or the bottom cover and secure to CUSB-BC with 4 bolts.
A load of 500N will be generated at the attachment surface if maximum retention force (100N) is applied. Design the attachment surface to withstand these loads.
When fixing from CUSB top When fixing from CUSB bottom

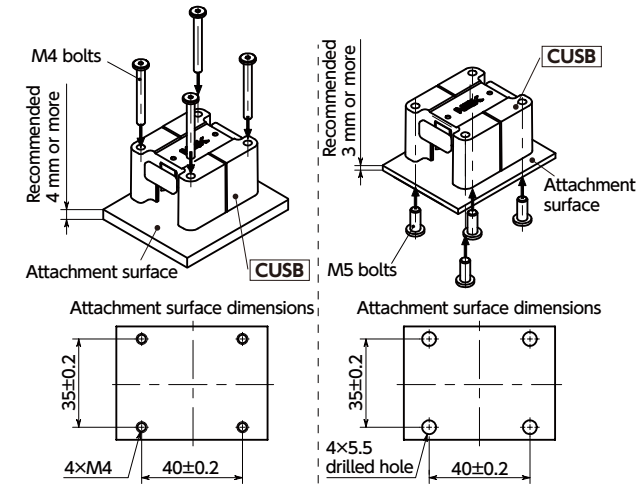


- Push the button on CUSB to release the lock and mount CUSB onto the square shaft.




- While continuing to push the button, move CUSB to the location it should be fixed.



- Release the push button to operate the lock mechanism, securing CUSB to the square shaft.



- Pushing the button again releases the lock, enabling CUSB or the square shaft to be moved to the desired position.



Related Products

1 button type CUSB-1B models are available.

➔ P.xxxx



⚠ Precautions for Use

- Use CUSB while fixed to a device/machine or bottom cover CUSB-BC. The square shaft will not be retained if using without installing to a device/machine or bottom cover.
- Insert the square shaft after securing CUSB to a device/machine or bottom cover. If the square shaft is inserted first, CUSB may be damaged.
- If only one side of the push button is pressed after locking, the lock in the direction the push button is pressed will release.
- CUSB is a product that uses friction fastening. In cases where oil, etc. adhered to the square shaft causes the friction coefficient to decrease or if impact loads or vibrations occur, the maximum retention force may decrease.
- The surface may be scratched depending on the material and surface finish of the square shaft.
- If excessive loads are applied, then the square shaft may be scratched or CUSB may be damaged.
- If excessive loads are applied and the push button is locked, operate the push button after loosening the bolts securing CUSB. CUSB may be damaged if operation is forced.

Part number specification

CUSB-2B-1212

