
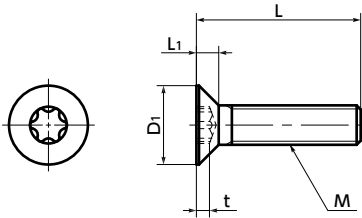


SNFXS Hexalobular Socket Flat Head Machine Screws

SUS Stainless steel  Protrusion



● Application

Prevention of damage to screw heads and reliable tightening

● Material/Finish



	SNFXS
Main Body	SUSXM7 (Equivalent to SUS304)
Strength Class	A2-50

● Part number specification

SNFXS-M5 - 20



- Hexalobular socket shapes*1 are designed to withstand high tightening torque compared to cross-recesses.
- Screw heads are unlikely to be damaged due to tightening, allowing safe and secure tightening to be performed.
- Mounting/removing with regular tools such as hex keys and screwdrivers is not possible. Also usable for applications including prevention of disassembly, theft, or tampering for devices or facilities.* 2
- Install and remove with **SKX** Dedicated Wrench or **SKXB** Dedicated Bit and **SRD** Dedicated Magnetic Screwdriver together.
- Use the **SKX-N** hexalobular wrench for extremely limited access spaces for mounting and removing in tight spaces.
- Conforms to ISO 14581.

*1 : The hexalobular shape is prescribed by JIS B 1015: 2008(ISO 10664: 2005)"Hexalobular internal driving feature for bolts and screws".
 *2 : Tools for hexalobular sockets are commercially available. When tampering prevention is the main objective, consider taper resistant screws. → P.xxxx

Unit : mm

Part Number ←1	M (Coarse)		L ←2										D1	L1	Applicable wrench	Hexalobular Socket No.	t	Mass (g)	Qty per pack		
	Nominal of Thread	Pitch	4	5	6	8	10	12	16	20	25	30									
SNFXS-M2	M2	0.4	4	5	6	8	10	12							3.8	1.2	SKX-6	6	0.64	0.14 - 0.29	20
SNFXS-M2.5	M2.5	0.45	4	5	6	8	10	12	16						4.7	1.5	SKX-8	8	0.79	0.27 - 0.65	20
SNFXS-M3	M3	0.5	5	6	8	10	12	16	20						5.5	1.65	SKX-10	10	0.83	0.49 - 1.1	20
SNFXS-M4	M4	0.7		6	8	10	12	16	20	25					8.4	2.7	SKX-20	20	1.53	1 - 2.5	20
SNFXS-M5	M5	0.8			8	10	12	16	20	25	30				9.3	2.7	SKX-25	25	1.51	2.2 - 4.8	20
SNFXS-M6	M6	1				10	12	16	20	25	30				11.3	3.3	SKX-30	30	1.78	3.9 - 7.4	20

● When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

● Related Products

SKX Hexalobular Wrench



SKXB Hexalobular Short Bit



SKX-N Hexalobular Wrench for Extremely Limited Access Spaces



SRD Magnet Screwdriver



Individual Sales → P.xxxxx	Cleanroom Wash & Packaging → P.xxxxx	Screw Length Adjustment → P.xxxxx	Vibration Resistant → P.xxxxx	Modification process for captive use → P.xxxxx
Available / Add'l charge	Available / Add'l charge	Available / Add'l charge	Available / Add'l charge	Not Available