




SPC-Z Plastic Screws - Threaded Rods - PC

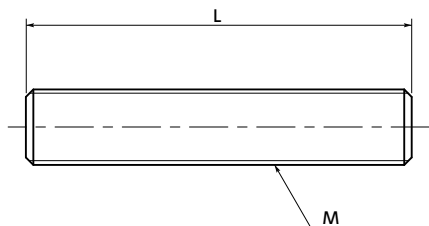

- PC (polycarbonate) has the highest shock resistance of engineering plastics.
- Max. Operating Temperature*1(min./max.):
-40/115°C
- It has low water absorbency and excellent weather resistance.
- The properties and precautions of plastic screws
→ P.xxxx
- Application

Electrical and electronic equipment and automobiles


Material/Finish



	SPC-Z
Main Body	PC (Polycarbonate) (Transparent)
Heat Resistance Temperature*1	115°C

*1 : This is the value for the resin material. The operating temperature of the product changes with performance conditions such as tightening torque.

Unit : mm






Part Number 	M (Coarse)		L	Tension Rupture Load*1 (N)	Mass (g)
	Nominal of Thread	Pitch			
SPC-M6-Z	M6	1	300	1136	11
SPC-M8-Z	M8	1.25	300	2088	14

*1 : Values in chart are for reference only. They are not guaranteed values.

Part number specification

SPC-M6-Z



 Individual Sales → P.xxxx	 Cleanroom Wash & Packaging → P.xxxx	 Screw Length Adjustment → P.xxxx	 Vibration Resistant → P.xxxx	 Modification process for captive use → P.xxxx
1 piece in 1 pack	Available / Add'l charge	Available / Add'l charge	Not Available	Not Available