


SRSAS Button Head Cap Screws with Three - Lobe Holes (with Pin) NEW



WEB Selection Tool
WEB CAD Download
Tamper Resistance
SUS Stainless steel

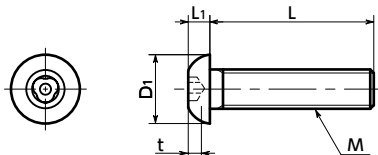

• Material/Finish RoHS2 Compliant

	SRSAS
Main Body	Equivalent to SUS304
Strength Class	Equivalent to A2-50

• Part number specification

SRSAS-M5-16



Order in number of packs.
The minimum order is 1 piece. → P.xxxx

- Button head cap screws with pin at the center of the three groove holes.
- This prevents mounting and removing with regular tools.
- Install and remove with **SRSAB** Dedicated Bits and **SRD** Dedicated Magnetic Screwdriver together.

• Application

Machinery / Tools / Equipment / Devices disassembly prevention / Tampering prevention / Theft prevention for outdoor facilities / Security measures / Safety measures

Unit : mm


Part Number	M (Coarse)		L												D1	L1	t	Bit Part No.	Screwdriver Part No.	Mass (g)		
	Nominal of Thread	Pitch	6	8	10	12	20	16	25	30	40	50	14	4.4							2.5	SRSAB-8
SRSAS-M3	M3	0.5	6	8	10	12	20										5.7	1.65	0.9	SRSAB-3	SRD-6.35	0.43 - 1.1
SRSAS-M4	M4	0.7	6	8	10	12	20	16	25	30							7.6	2.2	1.3	SRSAB-4	SRD-6.35	0.89 - 2.7
SRSAS-M5	M5	0.8		8	10	12	20	16	25	30	40						10.5	3.3	1.6	SRSAB-56	SRD-6.35	2.4 - 6.6
SRSAS-M6	M6	1			10	12	20	16	25	30	40	50					10.5	3.3	1.6	SRSAB-56	SRD-6.35	3.2 - 11
SRSAS-M8	M8	1.25					12	20	16	25	30	40	50	14	4.4	2.5	14	4.4	2.5	SRSAB-8	SRD-6.35	7.2 - 19

Part Number	L										Qty per Pack
	6	8	10	12	20	16	25	30	40	50	
SRSAS-M3	●	●	●	●	●						10
SRSAS-M4	●	●	●	●	●	●	●	●			10
SRSAS-M5		●	●	●	●	●	●	●	●		10
SRSAS-M6			●	●	●	●	●	●	●	●	10
SRSAS-M8				●	●	●	●	●	●	●	10

• The minimum order is 1 piece. → P.xxxx


• **SRSAB** Dedicated bit Unit : mm

Part Number	L	B	Mass (g)	Qty per Pack
SRSAB-3	32	6.35	5.9	1
SRSAB-4	32	6.35	7	1
SRSAB-56	32	6.35	7.3	1
SRSAB-8	32	6.35	8.3	1



• **SRD** Dedicated magnet screwdriver Unit : mm

Part Number	L	B	Mass (g)	Qty per Pack
SRD-6.35	210	6.35	98	1

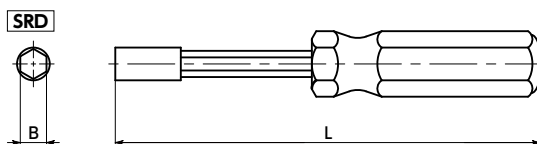

Individual Sales → P.xxxx
Cleanroom Wash & Packaging → P.xxxx
Screw Length Adjustment → P.xxxx
Vibration Resistant → P.xxxx
Modification process for captive use → P.xxxx