

- Plastic revolving grip superior in cost effectiveness

- Material/Finish




GTR	
Grip Part	Nylon 6 (Black)
Thread Part	SS400 Trivalent Chromate Treatment

Unit : mm

Part Number	D	M (Coarse)		Lm	d	H	Mass (g)
		Nominal of Thread	Pitch				
GTR-18-M5	18	M5	0.8	10	12	50	15
GTR-19-M6	19	M6	1	13	13	65	26
GTR-24-M8	24	M8	1.25	15	17	80	50
GTR-28-M10	28	M10	1.5	20	20	95	86

● Installation Method

Insert the spacer and bolt into the grip mainbody , set the disc spring to the mounting surface (refer to the cross section diagram after mounting), and tighten the bolt with a screwdriver. Then, check the tightening and the rotation of the grip main body, and insert the cap into the grip main body.

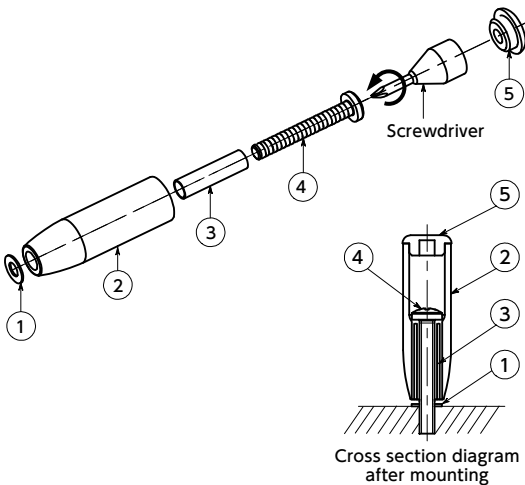

- Part number specification

GTR-28-M10

Product Code

Cleanroom Wash & Packaging → P.xxxx Not Available	Vibration Resistant → P.xxxx Not Available	Laser Marking → P.xxxx Available / Add'l charge	Modification of Shaft Hole Diameter → P.xxxx Not Available
--	---	--	---